

® = registered Trademark of BASF SE

# Tinuvin® 765

## Liquid hindered amine light stabilizer

### Characterization

Tinuvin 765 is a liquid hindered amine light stabilizer which is widely used to improve the weatherability of a variety of polymers.

### Chemical name


Bis(1,2,2,6,6-pentamethyl-4-piperidyl)sebacate + methyl 1,2,2,6,6-pentamethyl-4-piperidyl sebacate

### CAS number

41556-26-7 and 82919-37-7

### Structure

Tinuvin 765

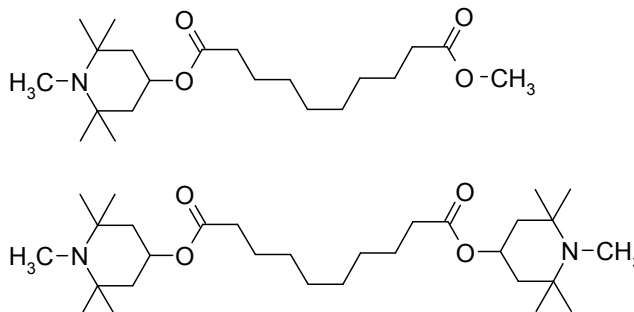

### Molecular weight

508 g/mol and 370 g/mol

### Applications

Tinuvin 765 is a highly effective liquid stabilizer used for a wide range of polymers and applications including polyurethanes, sealants, adhesives, elastomers, unsaturated polyesters, acrylics, vinyl polymers (PVB, PVC), styrene homo- and copolymers, polyolefins, liquid color concentrates, and other organic substrates.

### Features/benefits

Tinuvin 765 provides outstanding performance and its liquid form provides ease of handling and incorporation. It is compatible in a wide array of substrates. Tinuvin 765 has low volatility and is thermally stable.

### Product forms

Code: Liquid  
Appearance:

Tinuvin 765  
clear, slightly yellow liquid

**Guidelines for use**

Use levels for Tinuvin 765 range between 0.1 % and 1.0 %, depending on the substrate and performance requirements. Synergistic performance may be obtained when Tinuvin 765 is used with an ultraviolet light absorber. Performance data are available in many substrates.

For optimum effectiveness, adequate base stabilization (e. g. antioxidants/ processing stabilizers) of the polymer is necessary to prevent thermal oxidation. Sulfur containing stabilizers such as thioethers have sometimes been found to have a negative effect on the performance of Tinuvin 765. Such influences should be evaluated in specific customer testing.

Tinuvin 765 may crystallize during storage below 0 °C, however the product can be easily liquified by slight warming.

**Physical properties**

Melting range:	not applicable
Flashpoint:	92 °C
Specific gravity (20 °C):	0.993 g/cm <sup>3</sup>
Vapor pressure (20 °C):	1 E-4 Pa

<b>Solubility (20 °C)</b>	<b>% w/w</b>
Water	< 0.01
Acetone	> 50
Chloroform	> 50
Cyclohexane	> 50
Ethanol	> 50
Ethyl acetate	> 50
n-Hexane	> 50
Methanol	> 50
Dichloromethane	> 50
Toluene	> 50

<b>Volatility</b>	<b>Pure substance; TGA, heating rate 20 °C/min in air</b>
Weight loss (%)	Temperature (°C)
1.0	225
3.0	250
10.0	275

**Handling & Safety**

In accordance with good industrial practice, handle with care and avoid unnecessary personal contact. Protect skin. Avoid release to the environment.

For more detailed information please refer to the material safety data sheet.

**Note**

The descriptions, designs, data and information contained herein are presented in good faith, and are based on BASF's current knowledge and experience. They are provided for guidance only, and do not constitute the agreed contractual quality of the product or a part of BASF's terms and conditions of sale. Because many factors may affect processing or application/use of the product, BASF recommends that the reader carry out its own investigations and tests to determine the suitability of a product for its particular purpose prior to use. It is the responsibility of the recipient of product to ensure that any proprietary rights and existing laws and legislation are observed. No warranties of any kind, either expressed or implied, including, but not limited to, warranties of merchantability or fitness for a particular purpose, are made regarding products described or designs, data or information set forth herein, or that the products, descriptions, designs, data or information may be used without infringing the intellectual property rights of others. Any descriptions, designs, data and information given in this publication may change without prior information. The descriptions, designs, data and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained, all such being given and accepted at the reader's risk.

July 2011

BASF Schweiz AG  
Performance Chemicals/Plastic Additives  
Klybeckstrasse 141  
4057 Basel, Switzerland